



Test Report

Applicant : Arduino S.r.l.
Address : Via Andrea Appiani,25
 20900 MONZA (Italy)

Manufacturer : Arduino S.r.l.
Address : Via Andrea Appiani,25
 20900 MONZA (Italy)

Sample Name : Arduino Nano Screw Terminal
Sample Model : ASX00037
Sample Brand : Arduino

Received Date : August 1, 2022
Testing Period : August 1, 2022 ~ August 9, 2022

Sample Weight : 29.11g
Category under the : 5th category
WEEE Directive (Small equipment)
Test Results : Please refer to next page(s).

Result of Reuse/Recycling/Recovery Assessment

Recycling/Recovery	Recycling (%)	Recovery (%)
Recycling/Recovery Targets under the 2012/19/EU WEEE Directive	55	75
Result of Assessment	90.0	90.0
WEEE requirement compliance	OK	OK

Result of the Mark of crossed-out wheeled bin Assessment

Standard	Conclusion
EN50419:2006	Pass

CCIC (Shenzhen) Environmental Service Co., Ltd.

Completed by:

Bimei.Fan

Bimei.Fan

Reviewed by:

Andy.Zhou

Andy.Zhou

Approved by:


Renyou.Yang

Renyou.Yang





1. Appearance of the Product

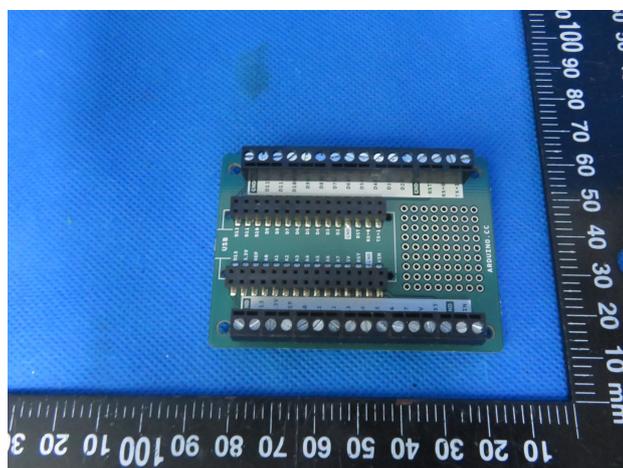


2. Selective Treatment for Materials and Components

According to Articles 6(1) and the Annex II of the WEEE Directive, this product contains components and material items are described in the following table.

Component/Material	Photo No.	Size & Quantity	Weight (g)
Printed circuit boards of mobile phones generally, and of other devices if the surface of the printed circuit board is greater than 10 square centimetres	A1	34.5cm ² × 1	29.11

3. Disassembly Tree

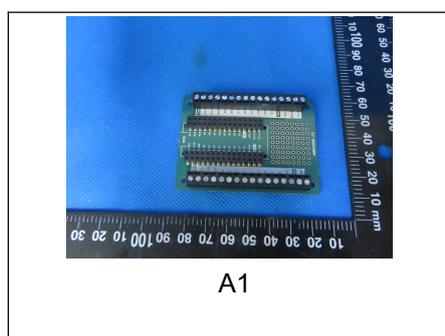

4. Disassembly Procedure

The disassembly procedure taken here is in accordance with the treatment requirements under the Annex VII of the WEEE Directive. In addition, to consider economic and efficiency factors, manual operation and disassembly tools have been applied to separate the components and materials from this product in order to simulate the scenario at the treatment facility, and to achieve the objective that the separated components and materials can be recycled and recovered.



(1) Connection technique:

For this product, the connection technology including as following:

Welding

(2) Disassembly tool:

The disassembly tools used for this product show as following:

Disassembly Tool	Pictures
Flat headed Screwdriver	

(3) Disassembly time:

10s under one person

(4) Loss during disassembly

Product weight before disassembly: 29.11g (A product and accessory)

Product weight after disassembly: 29.11g (A product and accessory)

Lost rate: 0.00%

5. Material and Recycling Information

According to the information declared by the applicant company, the material and recycling information for this product is described in the following table.

The reuse, recycling and recovery assessment for this product is based upon economic and efficiency considerations, and the waste treatment technologies and equipment that are most frequently available to the market.

Photo No.	Component / Material Composition	Weight (g)	Percent Weight (%)	Reuse/ Recycling (%)	Energy Recovery (%)	Recovery (%)
A1	Printed circuit boards, the surface is greater than 10 cm ²	29.11	100.0	90.0	—	90.0
Total		29.11	100.0	90.0	—	90.0

6. Recycling and Recovery Rate Calculation

Reuse Recycling& Recovery Rate using in the report are calculated as following formulas:

$$\text{Reuse \& Recycling Rate} = \frac{\text{Reuse \& Recycling Weight}}{\text{Product Total Weight}} (\%)$$



$$\text{Recovery Rate} = \frac{\text{Reuse \& Recycling Weight} + \text{Energy Recovery Weight}}{\text{Product Total Weight}} (\%)$$

Total weigh of the product is including the main product and accessories.



7. Crossed-out wheeled bin evaluation

According to EN50419:2006 to affirm the mark of crossed-out wheeled bin, through assessing and testing the mark of crossed-out wheeled on the sample, the mark conforms to EN50419:2006.

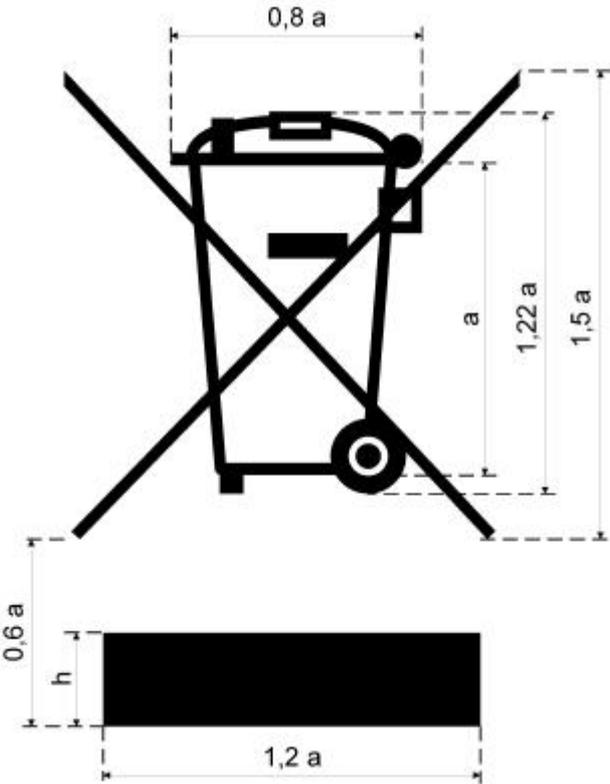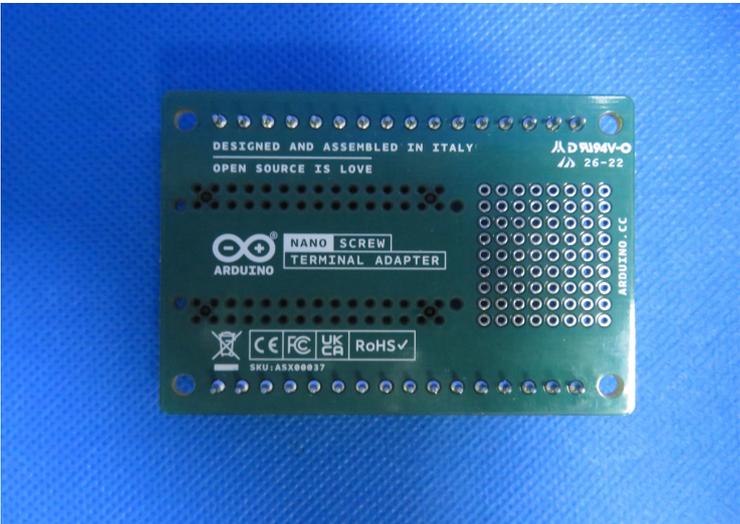Test Item	Test Procedure	Results
<p>Standard symbol with item number and dimensional relationship standard length</p>		<p>PASS</p>
<p>Location of the marking</p>		<p>PASS</p>



Test Item	Test Procedure	Results
Rubbing testing	Compliance is checked by inspection and by rubbing by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit. After this test ,the marking shall be legible ,it shall not be easily possible to remove the marking , if used , marking plates or labels shall show no curling	PASS

8. NNEX II of WEEE Directive

Selective treatment for materials and components of waste electrical and electronic equipment:

- Polychlorinated biphenyls (PCB) containing capacitors in accordance with Council Directive 96/59/EC of 16 September 1996 on the disposal of polychlorinated biphenyls and polychlorinated terphenyls (PCB/PCT) (1),
- Mercury containing components, such as switches or backlighting lamps,
- Batteries,
- Printed circuit boards of mobile phones generally, and of other devices if the surface of the printed circuit board is greater than 10 square centimetres,
- Toner cartridges, liquid and pasty, as well as colour toner,
- Plastic containing brominated flame retardants,
- Asbestos waste and components which contain asbestos,
- Cathode ray tubes,
- Chlorofluorocarbons (CFC), hydrochlorofluorocarbons (HCFC) or hydrofluorocarbons (HFC), hydrocarbons (HC),
- Gas discharge lamps,
- Liquid crystal displays (together with their casing where appropriate) of a surface greater than 100 square centimeters and all those back-lighted with gas discharge lamps,
- External electric cables,
- Components containing refractory ceramic fibres as described in Commission Directive 97/69/EC of 5 December 1997 adapting to technical progress Council Directive 67/548/EEC relating to the classification, packaging and labelling of dangerous substances ,
- Components containing radioactive substances with the exception of components that are below the exemption thresholds set in Article 3 of and Annex I to Council Directive 96/29/Euratom of 13 May 1996 laying down basic safety standards for the protection of the health of workers and the general public against the dangers arising from ionising radiation ,



- Electrolyte capacitors containing substances of concern (height > 25 mm, diameter > 25 mm or proportionately similar volume)

9. Recommendations for WEEE Directive Compliance

- In order to avoid the product not meeting the reuse/recycling/recovery targets regulated under the WEEE Directive and the regulations of EU countries, the applicant company should, when selecting material and components design, consider they can be easy to reuse and recycle. This consideration will lessen the impact of the required international environmental directives and also improve the product's competitiveness.
- It is recommended that the applicant company, when designing new product, especially where components and materials have a large weight ratio, should consider using recyclable materials in order to increase the product's reuse/recycling/recover ratio.
- The product should apply to the RoHS Directive (Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronics equipment). The hazardous substance specification in the Directive should be controlled in the homogenous material of this product.
If a product has changed its product design, or materials or components employed, then the product should be reassessed and retested in accordance with the WEEE Directive for reuse/recycling/recovery assessment and RoHS for restricted/ banned substances requirements.

This test document cannot be reproduced in any way, except in full context, without the prior approval in writing of the laboratory. The result of this test report is based on our received samples only.

*****End of Report*****